


REF.9545 MEET LIFT CONTROL GATEWAY

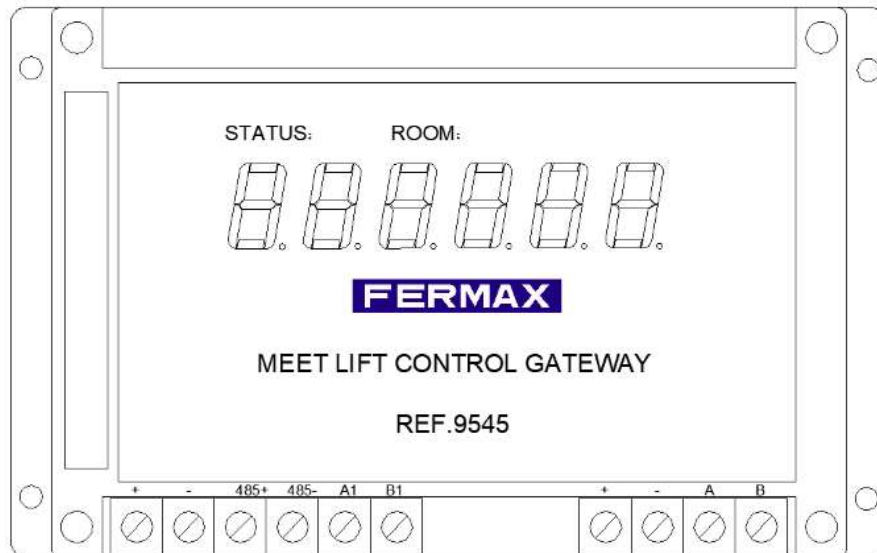

FUNCTIONS

The lift control gateway is a device between building system and lift system. five modes are defined in Meet lift control system. They are:

- The house owner calls lift up
- The house owner calls lift down
- The lift be authorized to the house owner's floor
- The house owner open door which visitor calling.
- Query the lifts status and display on monitor.

This device have 6 digital leds on the cover. It can display the COMMAND information and the STATUS + ROOM information of the house owner.

If apply F01616 (RELAY DECODER 10 E), this device should be configured firstly.

Each of F01616's NO/NC relay output is assigned to one floor, and all these information are save as an Excel file.

There is a configuration tooling, transfer the excel file into this device.

TECHNICAL SPECIFICATIONS

Power Consumption:

- On standby: 60mA
- Working: 110mA

Working voltage:

- 12 Vdc

Working Environment:

- Temperature: -40 °C – 55 °C
- Humidity: 10 – 93% (Non-condensing)

Dimension :

- 145×90×45mm

CONNECTIONS

10 terminal blocks 5 mm with screws.

- +,-: 12 Vdc power supply input.
- 485+, 485-: RS-485 data communication. Communicate with main panel in the unit.
- A1, B1: RS-485 data communication. Communicate with 3rd part lift control product
- A,B: RS-485 data communication. Communicate to F01616(RELAY DECODER 10 E)