


REF.9535 MEET PROXIMITY READER

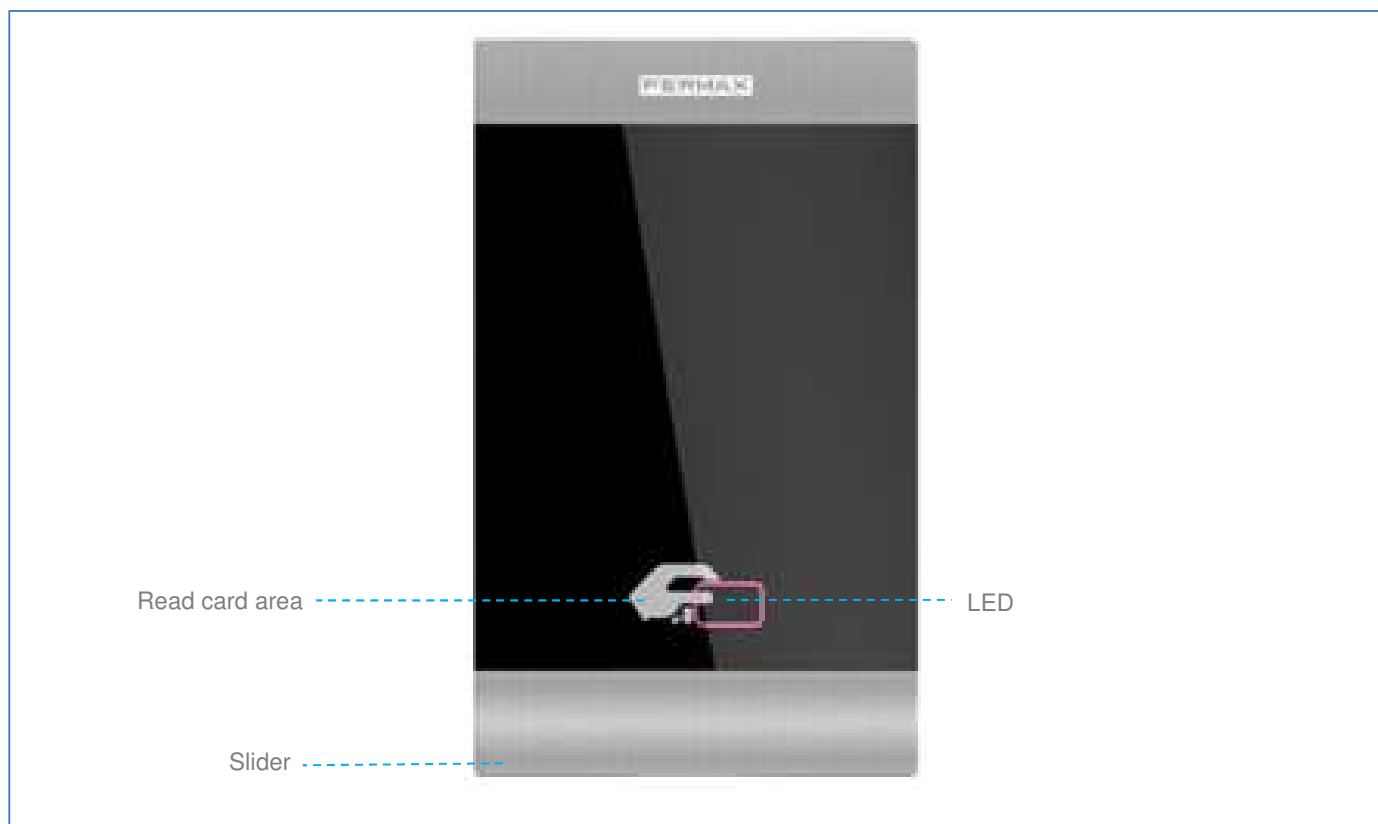

FEATURES

- Aluminum Profile
- High Resistance Tempered Glass
- Low Power Consumption
- Wide Range Working Environment
- Linux Modular Structure
- Available In 10 Languages
- Remote Firmware Update

FUNCTIONS

READ IC CARD

Tenants can access to their corresponding entrance by passing authorized IC card on the card reader area, the door will open and sent speech message if succeeded

REFERENCES

- Ref. 9535 MEET PROXIMITY READER
Ref. 9543 MEET PANEL FLUSH BOX – S

TECHNICAL SPECIFICATIONS

System:

- CPU: ARM Cortex-A7 1.2GHz
- FLASH: 128M
- SDRAM: 64M

Power Consumption:

- On standby: 125mA
- Working: 250mA

Working voltage:

- 12 VDC


Working Environment:

- Temperature: -20 °C – 70 °C
- Humidity: 20 – 93% (Non-condensing)
- IP 54
- IK 07


Connectivity:

- Ethernet RJ-45 Connector
- Exit button and door sensor connection
- NO, C, NC: Door lock release connection
- Built in web server for configuration and remote management

DIMENSIONS (mm)

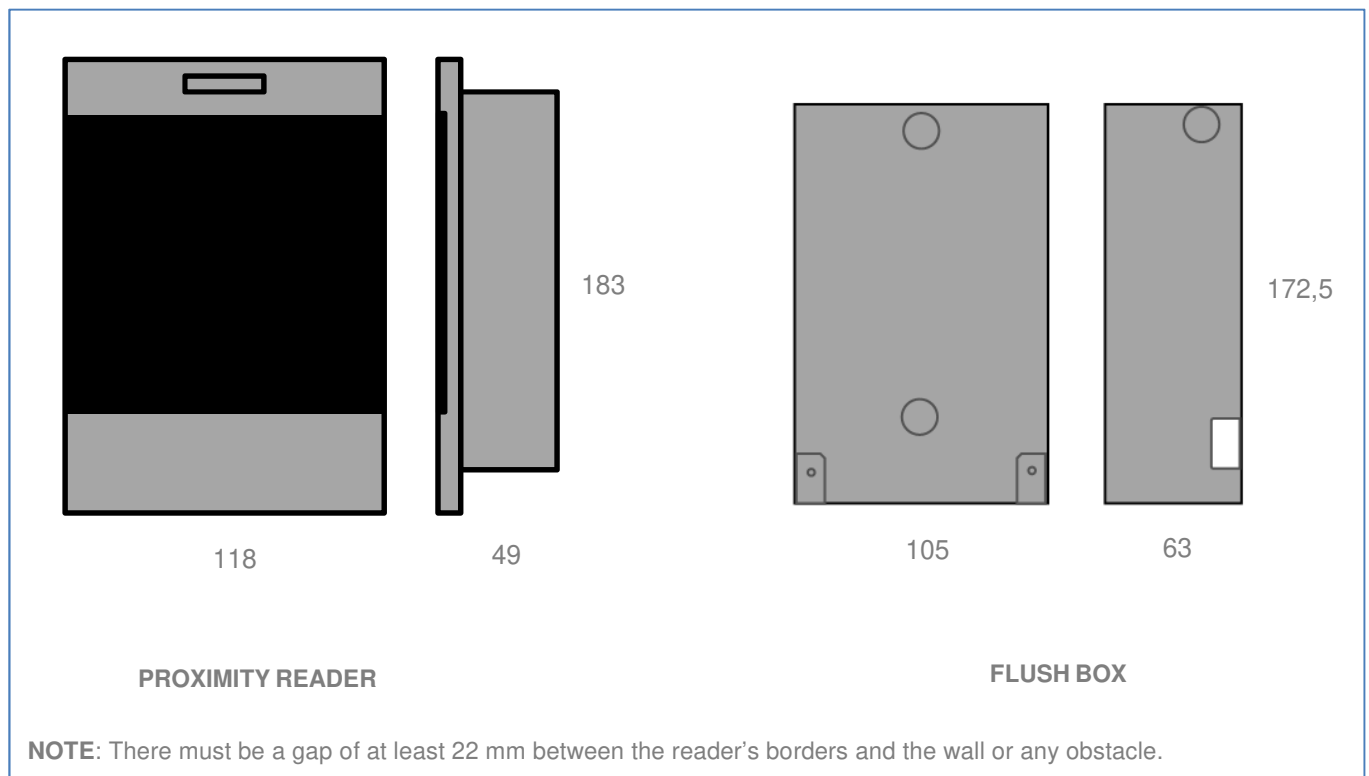

CONNECTIONS



RJ-45 10/100 Base -T Ethernet

+, - : 12 Vdc power supply input

BS, -, NA, SP: Exit button and door sensor connection

NO, C, NC: Door lock release connection

485+, 485-: RS485 serial port for spare